
#### Vecoplan RG32XL Shredder

#### Change Screen Size in Ten Minutes

Vecoplan's unique design gives the user complete control over the final shred size via an easily replaced discharge screen. Changing the shred size anywhere from 3" to 3/8" takes about ten minutes! This ability, along with the true dump-and-run capabilities of the Vecoplan shredders, provides the utmost in flexibility and control.



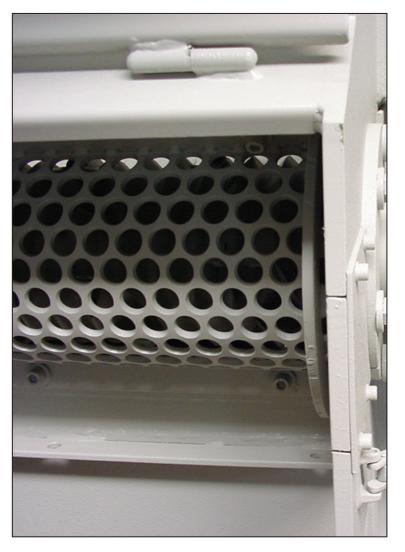


### **Proven Cutting System**

The Vecoplan design incorporates a heavy-duty, multiple piece cutting rotor assembly. It is engineered for high torque cutting efficiency and quiet operation. The cutting geometry allows for stabilized energy usage, high throughput, consistent particle size and long cutter wear. The milling of the rotor allows the mounting of cutters in such a pattern as to allow minimum cutting resistance, minimal revolutions of material to reduce to a size that will pass through the sizing screen. The rake angle and design of the cutters and counterknife produce high quality particles through actual shearing action.



"Torsion Point" cutters are 4 sided and indexable to allow 4 actual cutting surfaces.

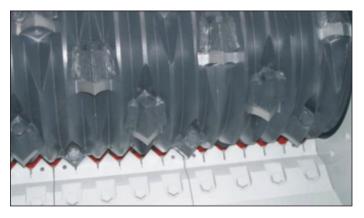

Counterknife standard tolerances are .015 to .020 clearances. Options are available for clearances to .010.

### Vecoplan VST-32i Features

# SureTrac<sup>™</sup> Gliding Floor


The SureTrac<sup>TM</sup> Gliding Floor payload discharge system makes discharging quick and safe. These developments allow for automatic loading, shredding, compaction and discharge, effortlessly with no manual intervention.





## Lock 'N Load™ System

Latest design in bin loading; The Lock 'n' Load™ Bin Lifter System developed jointly by VECOPLAN and Toter <sup>®</sup>, Inc. and the EasyAccess™ Loading Enclosure lifts and dumps at curb level without dust or safety issues. The SureTrac™ Gliding Floor payload discharge system makes discharging quick and safe. These developments allow for automatic loading, shredding, compaction and discharge, effortlessly with no manual intervention.







## **Vecoplan Mobile Document & Product Destruction Systems**

#### Advanced Controls and User-Friendly Interface



Large infeed hopper for true dump-and-run operation providing full surge capacity.

Body constructed of space-age **Transonite**<sup>®</sup> material that is both lightweight and stronger than steel, increasing payload capacity.

> Easy change screened discharge insures consistent and adjustable shred size for multiple shredding tasks.

Auger discharge assists with compaction of payload compartment.

> SureTrac<sup>™</sup> Walking Floor payload discharge system makes discharging quick and safe.



20

And St

-

Vecoplan's U-Rotor

Developed and Patented by Vecoplan,

the U-Rotor is the industry's most successful cutting rotor design. The cutting rotor has been engineered for durability and carries a Limited Lifetime Warranty. Cutting inserts are precision fit for easy maintenance.

Process Ram provides precision feed of material into the cutting rotor. Ram quickly adjusts to different load variables to maximize processing efficiency.






Single station graphic touch screen control console for operation and monitoring of process functions.

Latest design in bin loading. The **LOCK 'N' LOAd™** integral "lift and dump" bin lift developed jointly by Vecoplan and Toter ${
m Inc.}$  and the **EasyAccess**<sup>TM</sup> hinged composite door allow for hassle-free, dust-free, curb-level bin loading.

### Service and Tech Support that's Unrivaled

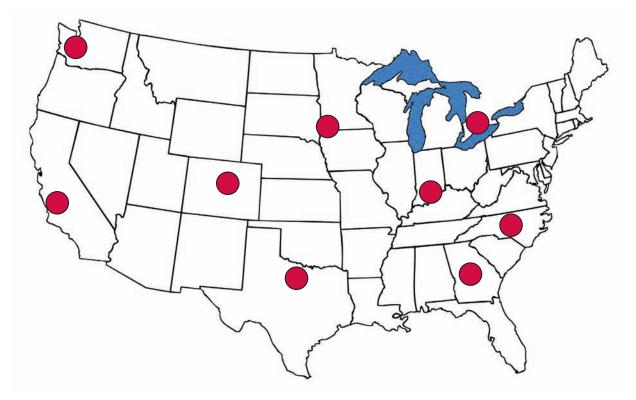

In addition to the numerous Navistar/International service facilities, Vecoplan has an established network of service facilities strategically located across North America. Our system of service technicians and technical support insures that your Vecoplan mobile shredding system will be operating at peak performance when you need it.

### Learn More at www.vecoplanllc.com







T H E U L T I M A T E S H R E D D I N G M A C H I N E P.O. Box 7224 • High Point, NC 27264 • Phone: (336) 861-6070 • Fax: (336) 861-4329